

SHALLOW FOUNDATION BOLLARD MODEL SMB-400



ASTM M30 (K4) CERTIFIED
FIELD ADJUSTABLE
PREFABRICATED SINGLE BOLLARD UNIT

GS-07F-0341V

GSA



- ◆ Crash tested and certified with ASTM F2656-07 M30 P1 rating (K4).
- ◆ Department of Defense (DoD) approved and listed on Anti-Ram Vehicle Barrier List.
- ◆ One bollard stops 15,000 lb. vehicle at 30 mph with less than 1 meter.
- ◆ Shallow foundation only 12" deep avoids underground utilities.
- ◆ Excavation only 66" wide X 12" deep with 3000 psi concrete (1.15 cy concrete per bollard).
- ◆ Only one prefabricated bollard unit to set. Allows for field adjustments.
- ◆ No field welding, bolted connections, or specialty subgrade required during installation.
- ◆ Easily installed with turns and across grade elevation changes.
- ◆ Bollard spacing up to 54" on center minimizes number of bollards required (fewer bollards reduces costs).
- ◆ Variety of bollard covers are available including stainless steel, plastic, decorative shapes, concrete, lighted covers, and others.
- ◆ Drawings, submittals, engineering support, and installation instructions with photos are included.

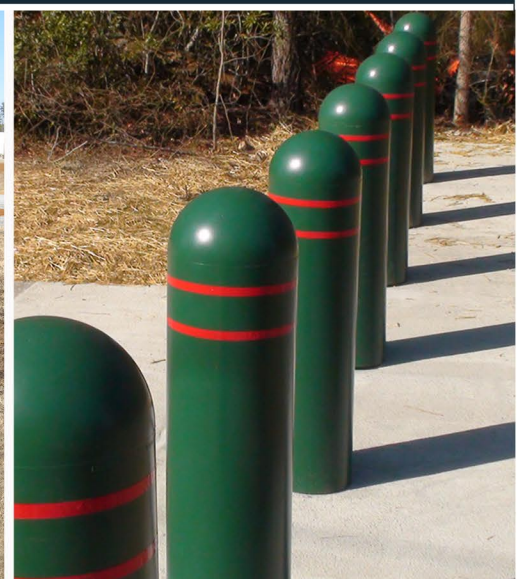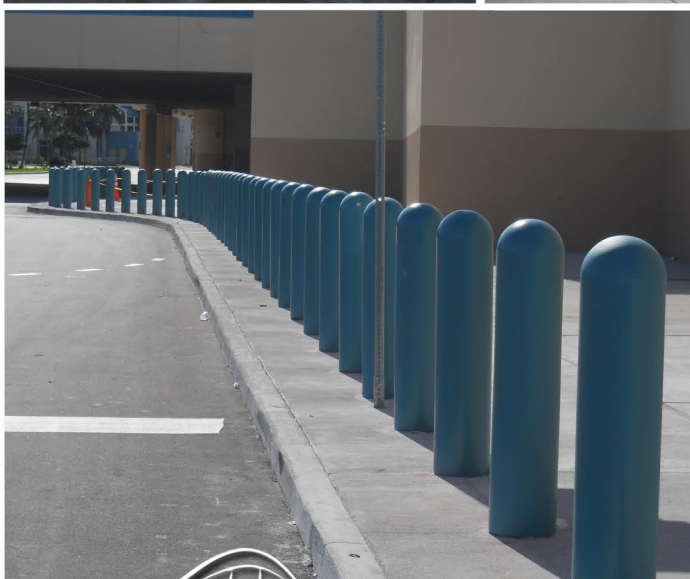

BARRIER 1
SYSTEMS, INC.

www.barrier1.us
(336) 617-8478 phone (336) 617-8471 fax

Barrier1 Systems, Inc.
Greensboro, NC USA

09132017